

8-22-00

A  
jc490 U.S. PTO  
09/643315  
08/21/00

jc918 U.S. PTO  
08/21/00

PATENT APPLICATION

TRANSMITTAL FOR U.S. PATENT APPLICATION  
UNDER 37 CFR §1.53(b)

**Box Patent Application**  
ASSISTANT COMMISSIONER  
OF PATENTS  
Washington, D.C. 20231  
Sir:

Attorney's Docket: 062891.0448

Transmitted herewith for filing is the original patent application of:

Inventor: Shmuel (nmi) Shaffer


For: APPARATUS AND METHOD FOR CONTROLLING AN AUDIO  
CONFERENCE

Enclosed are: 4 Sheets of Formal Drawings

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$690.00
Total Claims	52	20	32	X \$18 =	576.00
Independent Claims	6	3	3	X \$78 =	234.00
TOTAL FILING FEE =					\$1,500.00

Enclosed is a check in the amount of \$1,500.00 for filing fee. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of Baker Botts L.L.P.

BAKER BOTTS L.L.P.  
Attorneys for Applicant

  
Barton E. Showalter  
Registration No 38,302

Date: August 21, 2000

09643343 082100

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Shmuel (nmi) Shaffer  
Date Filed: August 21, 2000  
Title: APPARATUS AND METHOD FOR CONTROLLING  
AN AUDIO CONFERENCE

**BOX PATENT APPLICATION**

Honorable Assistant Commissioner

For Patents

Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application (38 pages), Declaration and Power of Attorney, 4 sheets of formal Drawings, Fee Transmittal, a check in the amount of \$1,500.00 to cover the application filing fee, Assignment, Assignment Cover Sheet, a check in the amount of \$40.00 to cover the cost of recording the assignment, and this Certificate of Mailing are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 21st day of August, 2000 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

*Willie Jiles*

Willie Jiles

Express Mail Receipt  
No. EK 327718460 US  
Attorney's Docket: 062891.0448

1

APPARATUS AND METHOD FOR CONTROLLING  
AN AUDIO CONFERENCE

TECHNICAL FIELD OF THE INVENTION

This invention relates generally to audio conferencing, and more particularly to an apparatus and method for controlling an audio conference.

5

062891.0448

BACKGROUND OF THE INVENTION

Consumers in businesses continue to demand more sophisticated communication systems that allow collaboration of voice, audio, and data. This demand  
5 fuels the development and deployment of new technologies that provide increased bandwidth and connectivity to end users. A conference call may now involve participants connecting using a variety of devices and technologies, and may also include other automated systems such as  
10 interactive voice response units, automated attendants, and other similar technologies. Communication providers face a challenge to integrate these different systems and provide reliable and effective control of participants and content in a conference.

15

062891.0448

SUMMARY OF THE INVENTION

The present invention solves many of the problems and disadvantages associated with prior conference technologies. In a particular embodiment, the present invention provides a method and apparatus for controlling an audio conference that disables media from a particular device that is determined to be undesirable.

In a particular embodiment, a method for controlling an audio conference includes establishing an audio conference between a number of devices, determining that audio content of media from a particular device is undesirable, and disabling the media from the particular device to terminate communication of the media from the particular device to the other devices in the audio conference.

In another embodiment, a conference bridge includes a number of ports to communicate media with a number of devices in an audio conference. The bridge also includes a media controller that determines that audio content of media from a particular device is undesirable. The media controller can disable media from the particular device to terminate communication of the media from the particular device to the other devices in the audio conference.

In still another embodiment of the present invention, a method for participating in an audio conference includes communicating media to a remote location and receiving mixed signals from the remote location, the mixed signals including media from a number of devices in an audio conference. The method also includes terminating participation in the audio conference, receiving a recorded prompt to rejoin the

062891.0448

audio conference, and communicating a command to the remote location to rejoin the audio conference.

In still another embodiment of the present invention, a method for remotely managing an audio conference through control of a conference bridge includes participating in an audio conference established by a conference bridge, and monitoring media from a number of devices in the audio conference to identify audio content from a particular device that is undesirable. The method also includes communicating a command to the conference bridge to disable media from the particular device to terminate communication of the media from the particular device to the other devices in the audio conference.

Technical advantages of the present invention include the ability to control an audio conference by determining that audio content of media from a particular device is undesirable and then disabling the media from the particular device to improve the quality and efficiency of the conference. In particular embodiments, the undesirable media may originate from a particular device that places its call on hold. A human or automated conference administrator may then monitor selectively mixed signals or single source signals to identify the undesirable media, and generate appropriate commands to disable communication of the media to other devices in the audio conference. Media monitoring may consider the media having the highest average power measurement and may automatically determine an undesirable audio in a conference by identifying power characteristics of media. In addition, the device

062891.0448

associated with the disabled media may receive a recorded prompt to rejoin the audio conference.

Other technical advantages include a conference bridge having a number of ports to communicate media with devices in an audio conference, and a media controller that can disable media from a particular device that is determined to be undesirable. The bridge may also include a media processor that receives, mixes, and communicates mixed signals to the devices. In a particular embodiment, the conference bridge, gateways, and devices may be coupled directly or indirectly using a packet network, such as an Internet Protocol ("IP") network. The conference administrator may couple to the network using any suitable device, such as a phone, computer, or other data and/or communication device. Using a suitable device, the conference administrator monitors and remotely manages the conference by selectively disabling media from one or more participating devices. Other technical advantages will be readily apparent to one skilled in the art from the following figures, descriptions, and claims.

## 10

15

20

15

20

15

20

FIGURE 6 is a flow chart of a method for remotely managing an audio conference.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates a conferencing system 10 that includes a conference bridge 12 and a number of devices 14 that can participate in an audio conference using conference bridge 12. A conference administrator operating, for example, device 14a, control terminal 16, or other appropriate device can monitor and selectively disable undesirable media from a particular device 14.

Conference bridge 12 may be an integral or distributed collection of hardware and/or software that communicates media with devices 14. Bridge 12 accomplishes this communication using physical ports, virtual ports, or other suitable direct or indirect connections (referred to generally as ports 18). One or more ports 18 may be used to manage the overall control and operation of bridge 12. Generally, bridge 12 receives media from devices 14, mixes or processes the media to generate mixed signals, and then communicates mixed signals to the devices 14 to establish an audio conference. Bridge 12 may be located in a network facility 20 that could also include a call manager, gateways, or other hardware and/or software to establish, maintain, and control audio conferences and media or signaling connectivity among a variety of devices 14. Also, the functionality of bridge 12 may be distributed among one or more devices 14 participating in an audio conference.

There are a number of devices 14 that can participate in an audio conference in system 10. Devices 14a-14d are shown coupled directly to ports 18 on bridge 12. Devices 14 may, for example, include cordless or cellular telephones, personal digital assistants

062891.0448

("PDAs"), or other wireless devices (shown generally as 14b). Also, devices 14 may include telephony software running on a computing device, as shown generally by device 14d. Similarly, devices may be traditional plain  
5 old telephone ("POTS") devices, analog phones, digital phones, Internet Protocol ("IP") telephony devices, or other computing and/or communication devices that communicate audio content using analog and/or digital signals.

10 Other devices 14 in system 10 may be coupled to bridge 12 using intermediate components. For example, device 14e couples to bridge 12 using the public switched telephone network ("PSTN") 22. Devices 14f-14h couple to  
15 bridge 12 using PSTN 22 and a private branch exchange, automated call distributor, or other similar device (referred to generally as PBX 24). In a particular embodiment, PBX 24 may include a music-on-hold ("MOH") capability or other functionality (shown generally as MOH  
20 26) that plays audio when calls to devices 14f-14h are suspended, parked, or otherwise placed on hold. Audio may include a recorded audio segment, a radio broadcast, or any other audio content. One specific advantage of system 10 is the ability to disable media from devices  
25 14f-14h that are placed on hold to terminate communication of undesirable audio to other conference devices. In one embodiment, bridge 12 and PBX 24 may engage in a signaling protocol that, using appropriate commands, directs PBX 24 to disable music-on-hold or other audio for any devices 14 participating in  
30 conferences managed by bridge 12.

Bridge 12 allows for a variety of devices 14 to engage in an audio conference. Also, using terminal 16,

004435 034100

device 14a or other suitable device (referred to generally as a conference administrator device) a human or automated conference administrator may direct bridge 12 to disable undesirable media. In one embodiment, a conference administrator operating device 14a monitors an audio conference using inband commands, such as dual tone multifrequency ("DTMF") commands, voice commands, or other appropriate inband signaling. Alternatively or in addition, a conference administrator may use terminal 16 to establish a remote or local administrative link or other suitable out-of-band signaling to bridge 12 to monitor and selectively disable media in an audio conference. Terminal 16 includes a graphical user interface 26 that allows the conference administrator to establish, monitor, and/or selectively disable media for an audio conference. Terminal 16 couples to bridge 12 directly, using a dedicated dial-up connection, using a global computer network such as the Internet, or using any other suitable wireline or wireless communication techniques to both receive status information from bridge 12 and to communicate commands to bridge 12 to control the audio conference.

In operation, bridge 12 establishes an audio conference with a number of devices 14 by initiation of one of the conference devices, automated or manual establishment of the conference using terminal 16, or through some other suitable techniques. For the purposes of the discussion, assume bridge 12 establishes an audio conference between devices 14a, 14b, 14d, and 14f. System 10 contemplates any other arrangement or establishment of an audio conference among any selection of devices 14 using bridge 12. Bridge 12 receives media

from participating devices 14 and, using suitable signal processing techniques, mixes the media to produce mixed signals. In one embodiment, each device receives a mixed signal that includes contribution from all other devices  
5 except itself. In this example, device 14a receives a mixed signal that includes contributions from devices 14b, 14d, and 14f. Similarly, device 14f receives a mixed signal including contributions from devices 14a, 14b, and 14d. During the audio conference, bridge 12  
10 receives media from participating devices 14, mixes signals, and provides selectively mixed signals to the devices 14.

Now assume for the purposes of this audio conference, that device 14f places the conference call on  
15 hold. Placing a call on hold contemplates a hold, suspend, park, transfer or other similar activity that causes the communication of audio (e.g., recorded audio segments, broadcast music, advertising, announcements) or other undesirable media. In a particular embodiment, MOH  
20 26 of PBX 24 communicates audio to bridge 12 when device 14f places a call on hold to establish communication with device 14e. All other conference participants hear the audio, which is undesirable. Music-on-hold or other recorded or live audio generated by PBX 24 is just one  
25 example of undesirable media. Other examples may include media associated with a particularly offensive or dominating participant, media containing excessive static or low audio quality, or any other media from a particular device that is considered undesirable.

30 A human or automated conference administrator operating device 14a or terminal 16 hears or detects the offending media in the conference. To identify the

00434 000400

source of the undesirable media, device 14a may receive in sequence a number of mixed media signals, each mixed signal excluding media from at least one other device 14 in the audio conference. In this manner, conference administrator selects the mixed signal in the sequence that effectively terminates communication of the undesirable media. In a particular case, the conference administrator at device 14a selects the mixed media that includes only the contributions of device 14b and 14d, effectively removing the audio generated as a result of device 14f being placed on hold. The conference administrator communicates a command via DTMF tones, voice commands, administrative link, or other suitable technique to bridge 12 to temporarily disable media associated with device 14f. The term disable contemplates any technique to prevent mixing of undesirable media for presentation to other conference participants. Bridge 12, device 14a, or other components in system 10 may still receive and potentially monitor disabled media associated with device, but the disabled media will not be mixed and shared with other conference participants. In a particular embodiment, bridge 12 communicates a recorded prompt to device 14f that invites device 14f to rejoin the audio conference, for example, after the call has been taken off hold.

In another embodiment, device 14a, instead of monitoring selectively mixed signals, may receive single source signals from each device in the audio conference. Upon reviewing media from devices 14b, 14d, and 14f, the conference administrator identifies the undesirable audio content as the single source signal from device 14f. Again, the conference administrator issues a command to

bridge 12 using any suitable technique to disable media from device 14f.

In another embodiment, an automated conference administrator and/or bridge 12 automatically identifies power characteristics of media associated with device 14f as indicating a recorded audio segment, radio broadcast, or other undesirable media. In this case, bridge 12 autonomously disables media when it detects the presence of undesirable media in audio conferences. Alternatively, bridge 12 identifies potentially undesirable media and prompts a human conference administrator operating device 14a or terminal 16 to take appropriate action to disable media.

Bridge 12 may disable media associated with device 14f with a prompt to rejoin or with no prompt. Bridge 12 communicates a prompt to rejoin continuously on port 18 associated with device 14f so that when device 14f is taken off hold, the associated conference participant may respond to the prompt to rejoin by issuing a DTMF command, voice command, or other suitable command to rejoin the conference. Upon receiving this command, bridge 12 enables media from device 14f to rejoin the audio conference. If bridge 12 disables media associated with device 14f without a prompt, device 14f rejoins the conference upon the discretion of the conference administrator. System 10 contemplates any combination of prompting and no prompting to device 14 having disabled media to provide any level of conference administrator or participant control of the audio conference.

Technical advantages of system 10 include the ability to control an audio conference by determining that audio content of media from a particular device is

062891.0448

undesirable and then disabling the media from the particular device to improve the quality and efficiency of the conference. In particular embodiments, the undesirable media may originate from a particular device  
5 that places its call on hold. A human or automated conference administrator may then monitor selectively mixed signals or single source signals to identify the undesirable media, and generate appropriate commands to disable communication of the media to other devices in  
10 the audio conference. Media monitoring may consider only the media having the highest average power measurement and may automatically identify potentially undesirable audio in a conference by determining power characteristics of media. In addition, the device  
15 associated with the disabled media may receive a recorded prompt to rejoin the audio conference.

FIGURE 2 illustrates a particular embodiment of system 10 that includes components communicating using packet network 50. In this particular embodiment, system  
20 10 includes a call manager ("CM") 52 that manages the overall establishment of calls in system 10. Conference bridge 12 provides overall control and media mixing for audio conferences as described with reference to FIGURE 1. A gateway ("GW") 56 allows devices 14 coupled to PSTN  
25 22 or other circuit-switched networks to participate in audio conferences using packet network 50. System 10 also includes a variety of devices 14 (similar to FIGURE 1) and terminal 16 that may be used by a conference administrator to control an audio conference.

30 Bridge 12 includes a number of components to establish conferences, mix media, and provide overall control and management of audio conferences. A media

062891.0448

processor ("MP") 60 operating with digital signal  
processing (DSP) resources 62 performs encoding,  
transcoding, compressing, decompressing, decoding,  
mixing, and other signal processing functions to  
5 establish and control an audio conference. For example,  
DSP resources 62 may perform adaptive speech recognition  
(ASR) or other suitable techniques to support voice  
commands. Media controller ("MC") 64 provides the  
overall control and management of multiple audio  
10 conferences conducted using bridge 12. Specifically, MC  
64 may provide administrative control, port assignment,  
admission control, media resource allocation, command  
generation and receipt, undesirable media analysis, power  
level determination, and any other activities to control  
15 the conference and direct MP 60 to provide the  
appropriate signal processing. Specifically, MC 64 may  
command MP 60 to generate particular mixed signals or  
single source signals for communication to a port  
associated with a conference administrator for effective  
20 monitoring of the audio conference. In addition, MC 64  
receives inband or administrative link signals from the  
human or automated conference administrator to disable or  
enable media mixing from particular devices. To  
establish and manage multiple audio conferences, MC 64  
25 maintains a conference table 66 and voice prompts 67 in  
memory 68. Memory 68 may be any suitable form of a  
volatile or non-volatile memory that is integral or  
separate from bridge 12. Bridge 12 contemplates any  
suitable arrangement and coordination of functions  
30 between MP 60, DSP resources 62, and MC 64.

In operation, devices 14m-14q and other devices  
coupled to packet network 50 using GW 56, such as device

062891.0448

14i, can establish an audio conference using bridge 12. In this particular packet-based environment, bridge 12 establishes an audio conference using any number of virtual port or connection assignments, such as Internet  
5 Protocol ("IP") addresses, virtual channel or virtual path identifiers ("VCI/VPI"), session initiation protocol ("SIP") addresses, IP telephony addresses and extensions, PSTN telephone numbers, or any other suitable addresses. Using these addresses, bridge 12 receives media from  
10 devices 14, encodes, decodes, and/or transcodes the media into a proper format using MP 60 and DSP resources 62, and generates a number of mixed signals for communication back to devices 14. Both the media received by bridge 12 and the mixed signals communicated by bridge 12 are in  
15 the form of audio content encoded in packets, cells, or other portions or segments of information suitable for communication over packet network 50 (referred to generally as packets). Devices 14 receive this packetized audio content for presentation to conference  
20 participants. If a device 14 couples to PSTN 22 or other circuit-switched network, GW 56 provides appropriate translation between packet-based information communicated by packet network 50 and circuit-switched information communicated by PSTN 22.

25 A conference administrator receives selectively mixed signals or single source signals from bridge 12 to identify audio content of media from a particular device 14 that is undesirable. Using commands from device 14 or commands from terminal 16, a human conference  
30 administrator may selectively disable media from particular devices. Alternatively, bridge 12 may

062891.0448

autonomously identify undesirable media and disable the media or prompt an administrator to disable the media.

FIGURE 3 illustrates table 66 maintained by bridge 12 to establish and manage an audio conference. Table 66 includes a number of entries, each entry specifying a conference identifier 70 and addresses 72 of devices 14 participating in the conference. Each entry also specifies a port 74, suitable power measurement 76, and disable status 78 for each device 14 in the conference. Addresses 72 may include IP address, SIP address, telephone extensions, or any other suitable identifier or address that allows bridge 12 to designate different devices 14 participating in an audio conference. In a particular embodiment, one or more addresses 72 may be shaded to indicate a device acting as a conference administrator with authority to disable and enable media from other devices. Ports 74 designate any physical or virtual port or connection associated with devices 14 in the audio conference. Power measurement 76 indicates any suitable power measurement that allows bridge 12 to determine the dominant devices 14 in an audio conference and, in a particular embodiment, to identify power characteristics of media associated with a particular device 14 as indicating a recorded audio segment or radio broadcast. For example, bridge 12 may generate entries for power measurement 76 using averages over time, filters, or other suitable content analysis techniques that allow bridge 12 to determine trends in audio content. Disable status 78 includes both an announce and no announce option. In the announce option, bridge 12 communicates a recorded prompt to a particular device with disabled media inviting the device to rejoin the

audio conference. Disable status 78 with no announce indicates that disabled media will not be enabled without intervention from the conference administrator.

Table 66 contains any number of entries, each entry specifying a current conference maintained by bridge 12. For example, entry 80 specifies conference #1 that includes four devices, with the device having an address "A" serving as conference administrator. Each device has an associated port 74 and power measurement 76, and currently no devices in conference #1 have disabled media. Similarly, entry 82 specifies conference #2 that includes six devices, with devices having addresses "john@cisco" and "128" having authority to act as conference administrators to disable media. Again, each device has an associated port 74 and power measurement 76, and no devices currently have disabled media.

FIGURE 4 now illustrates table 66 showing selected devices having disabled media. Specifically, in conference #1, media associated with the device identified by address "214-953-6500" has been disabled with the announce option. Therefore, the device associated with this address will receive a prompt to rejoin the conference. In conference #2, bridge 12 disabled media from two devices. Specifically, media associated with the device having an address of "408-555-1000" has been disabled with the announce option, while media associated with the device having an address of "x5108" has been disabled with the no announce option. In the latter case, the device cannot rejoin the conference without intervention from one of the two conference administrators or bridge 12. Although FIGURES 3 and 4 illustrate information maintained by bridge 12 in

a table format, system 10 contemplates any storage of information at one or more locations in any suitable format to facilitate establishment and management of audio conferences in system 10.

5       FIGURE 5 is a flow chart of a method to control an audio conference that begins when bridge 12 initiates a conference at step 100. This may be done in response to a participant issuing commands at an associated device 14, through administrator control using an associated  
10 device 14 and/or terminal 16, through a meet-me conferencing operation, or other suitable technique. Before, during, or after initiating the conference at step 100, bridge 12 may establish one or more conference administrators at step 102. Each conference  
15 administrator associated with an established conference receives suitable levels of authority to add and remove devices, monitor content, disable and enable media associated with devices, or terminate the conference. Bridge 12 stores conference parameters as an entry in  
20 table 66 at step 104.

Upon establishing an audio conference, bridge 12 performs any variety of functions either autonomously or in response to commands received inband or through an administrative link from a conference administrator.  
25 These functions may include adding a device (step 110), removing a device (step 120), monitoring content (step 130), disabling media associated with a device (step 140), enabling a device (step 150), and terminating the conference (step 160). Bridge 12 also performs the media  
30 processing, which may include encoding, decoding, transcoding, mixing, filtering, and other signal processing functions to allow the receipt of media from

001230" 5764960

multiple devices 14, the mixing of this media in an appropriate manner, and delivery of mixed signals to devices 14 to establish an audio conference.

If device 14 is to be added at step 110, bridge 12  
5 assigns a port 18, allocates appropriate DSP resources 62, adds the device 14 to table 66 at step 112 and, if appropriate, establishes administrative authority for device 14 at step 114. In a particular situation where device 14 couples to bridge 12 using PBX 24, signals may  
10 be communicated between bridge 12 and PBX 24 to disable music-on-hold or other communication of undesirable audio by PBX 24. Similarly, if device 14 is to be removed from a conference at step 120, bridge 12 deletes the device from table 66 at step 122 and deallocates its port 18 and  
15 associated DSP resources 62.

To review content at step 130, bridge 12 determines power measurement 76 at step 132, and updates table 66 at step 134. Bridge 12 may implement a number of content review techniques at step 136. In one embodiment, bridge  
20 12 autonomously reviews content based on a suitable power characteristic to identify any recorded audio segments, radio broadcast, or other undesirable content. Alternatively, bridge 12 may allow a human conference administrator to monitor content. This may be done by  
25 communicating to device 14 and/or terminal 16 associated with conference administrator mixed signals that selectively exclude particular devices, single source signals, or other signals that allow conference administrator to identify the undesirable audio content.  
30 In a particular embodiment, bridge 12 does not communicate all variations of mixed signals or single

004434.032100

signal sources, but communicates those signals associated with devices 14 having the highest power measurements.

Bridge 12 may disable media associated with device 14 in an audio conference at step 140. Bridge 12 removes  
5 the audio content from mixed signals that are communicated to other devices 14 at step 142, and updates disable status 78 in table 66 at step 144. For disabled media with an announce option as determined at step 146, bridge 12 communicates a recorded prompt to rejoin on  
10 port 18 associated with device 14 at step 148.

Bridge 12 enables previously disabled media associated with devices 14 at step 150 using a number of techniques. For example, device 14 may rejoin the conference based on a response to the recorded prompt  
15 played at step 148. This response may be a DTMF tone, a voice command, or other appropriate indication that device 14 wants to rejoin the conference. Also bridge 12 may enable device 14 in response to receiving a command from the conference administrator operating device 14  
20 and/or terminal 16. Bridge 12 may also enable device 14 autonomously based on a change in received audio content due to termination of a recorded message such as music-on-hold, termination of excessive static on the line, detection of a human voice, or other triggering activity  
25 autonomously detected by bridge 12. In response to any of these commands or autonomous events, bridge 12 adds audio content of the enabled device 14 to mixed signals communicated to other devices 14 in the conference at step 152. Bridge 12 updates disable status 78 in table  
30 66 at step 154.

If bridge 12 determines autonomously or receives direction from one or more devices 14 to terminate the

062891.0448

conference at step 160, then the method ends. Otherwise, the method continues to execute the functions illustrated in steps 110-160. Although shown as executing these functions in sequence, it should be understood that  
5 system 10 allows functions to be executed by bridge 12, device 14, or other components of system 10 simultaneously, in sequence, or in any other ordered arrangement. Also, the method performed in FIGURE 5 may be initiated as an instantiated process for each  
10 conference handled by bridge 12, and executed simultaneously in a distributed processing environment.

FIGURE 6 is a flow chart of method for remotely controlling an audio conference. This method may be executed by one or more devices 14 or terminals 16  
15 operated by conference administrators or participants. In a particular embodiment, control of the audio conference is performed remotely through the issuance of commands that are either inband (e.g., DTMF tones, voice commands) or based on commands received from terminal 16  
20 using a suitable wireline or wireless administrative link. The method begins at step 200 when a participant with sufficient class of service or authority establishes or joins an audio conference. A participant with sufficient authority to monitor and control an audio  
25 conference will be referred to generally as a conference administrator. Using associated device 14 or terminal 16, conference administrator engages in an audio conference at step 202 by communicating media and receiving mixed signals associated with other devices in  
30 the audio conference.

The conference administrator may selectively disable media associated with devices 14 as determined at step

204 using a variety of techniques. The conference administrator receives mixed or single source signals at step 206. These signals may be received in serial, upon conference participant selection, or using any other  
5 sequence or arrangement that allows the conference administrator to determine undesirable audio content in a conference. If receiving mixed signals, bridge 12 provides device 14 operated by the conference administrator with a number of selectively mixed signals,  
10 each selectively mixed signal excluding audio content from one of the devices 14. The conference administrator reviews these selectively mixed signals to determine which signal properly excludes the undesirable audio content. Alternatively, bridge 12 may provide device 14  
15 of the conference administrator with single source signals, allowing the conference administrator to specifically identify the undesirable single source signal.

Using any of the monitoring techniques discussed at  
20 step 206, the conference administrator identifies audio content from a particular device 14 that is undesirable at step 208. Based on this identification, device 14 or terminal 16 communicates a command to bridge 12 to disable the media from the particular device 14 at step  
25 210. During steps 206-210, the conference administrator may interact with GUI 26 on terminal 16 to select audio content to review, the manner and sequence in which it is reviewed, and to initiate communication of a command to bridge 12 to disable media. GUI 26 contemplates any form  
30 of interactive or passive graphical presentation about information associated with the audio conference. Alternatively, steps 206-210 may be performed by the

062891.0448

conference administrator using appropriate DTMF commands, voice commands, or other suitable technique.

The conference administrator may periodically review those devices 14 associated with disabled media and  
5 determine at step 220 whether any devices 14 should rejoin the audio conference. Device 14 or terminal 16 associated with the conference administrator communicates a command to enable media from the particular device 14 at step 222. If the audio conference is over at step 224  
10 then the method ends, otherwise the method continues at step 202.

Although the present invention has been described with several embodiments, a myriad of changes, variations, alterations, transformations, and  
15 modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes, variations, alterations, transformations, and modifications as fall within the scope of the appended claims.

001230 " 51664950

WHAT IS CLAIMED IS:

1. A method for controlling an audio conference,  
comprising:

5 establishing an audio conference between a plurality  
of devices;

determining that audio content of media from a  
particular device is undesirable; and

10 disabling the media from the particular device to  
terminate communication of the media from the particular  
device to the other devices in the audio conference.

2. The method of Claim 1, wherein the media from  
the particular device comprises audio generated as a  
result of the particular device placing on hold a call  
15 associated with the audio conference.

3. The method of Claim 1, wherein the particular  
device comprises a private branch exchange servicing a  
phone used by a conference participant, the private  
20 branch exchange operable to communicate audio when the  
conference participant places on hold a call associated  
with the audio conference.

4. The method of Claim 1, wherein the audio  
25 conference comprises a meet-me conference and further  
comprising mixing media from the devices using a  
conference bridge.

001280 5 FEB 4 35 0

5. The method of Claim 1, wherein establishing an audio conference comprises:

receiving media from the devices;

mixing media from the devices to generate a  
5 plurality of mixed signals;

communicating mixed signals to the devices.

6. The method of Claim 1, wherein determining comprises:

10 communicating a plurality of selectively mixed signals to a conference administrator device for monitoring, each selectively mixed signal excluding media from at least one of the devices; and

receiving a command from the conference  
15 administrator device to disable media from the particular device.

7. The method of Claim 6, wherein the command comprises an inband dual tone multifrequency signal, a  
20 spoken command, or an out-of-band signal from an administrative link.

8. The method of Claim 6, wherein the selectively mixed signals exclude media from devices having the  
25 highest average power measurement.

001220" 51664960

9. The method of Claim 1, wherein determining comprises:

communicating a plurality of single source signals to a conference administrator device for monitoring, each  
5 single source signal generated by one of the devices; and  
receiving a command from the conference administrator device to disable media from the particular device.

10 10. The method of Claim 9, wherein the single source signals comprise media from devices having the highest average power measurement.

11. The method of Claim 1, wherein determining  
15 comprises identifying power characteristics of media associated with the particular device as indicating a recorded audio segment or broadcast radio.

12. The method of Claim 1, further comprising:  
20 communicating a recorded prompt to the particular device, the recorded prompt inviting the particular device to rejoin the audio conference; and  
receiving a command to rejoin the audio conference from the particular device.

25

13. The method of Claim 12, wherein the command comprises an inband dual tone multifrequency signal, a spoken command, or an out-of-band signal from an administrative link.

30

007230-5724950

14. The method of Claim 1, further comprising enabling media from the particular device to resume communication of media from the particular device to the other devices in the audio conference.

062891.0448

15. A conference bridge, comprising:

a plurality of ports to communicate media with a plurality of devices in an audio conference; and

a media controller operable to determine that audio  
5 content of media from a particular device is undesirable,  
the media controller further operable to disable media  
from the particular device to terminate communication of  
the media from the particular device to the other devices  
in the audio conference.

10

16. The conference bridge of Claim 15, further comprising a media processor operable to:

receive media from the devices;

15 mix media from the devices to generate a plurality  
of mixed signals; and

communicate mixed signals to the devices.

17. The conference bridge of Claim 15, further comprising a gateway coupled to a selected device in the  
20 audio conference using a circuit-switched network, the  
gateway operable to communicate media between the  
conference bridge and the circuit-switched network.

18. The conference bridge of Claim 15, wherein:

25 the ports comprise virtual ports; and

the media comprises packets of audio information.

19. The conference bridge of Claim 15, wherein the  
media from the particular device comprises audio  
30 generated as a result of the particular device placing on  
hold a call associated with the audio conference.

001280" 5754360

20. The conference bridge of Claim 15, wherein the particular device comprises a private branch exchange servicing a phone used by a conference participant, the private branch exchange operable to communicate audio  
5 when the conference participant places on hold a call associated with the audio conference.

21. The conference bridge of Claim 15, wherein:  
the conference bridge communicates a recorded prompt  
10 to the particular device, the recorded prompt inviting the particular device to rejoin the audio conference; and  
the media controller receives a command to rejoin the audio conference from the particular device.

22. The conference bridge of Claim 15, further comprising a memory operable to store a plurality of conference entries, each conference entry identifying the devices in the audio conference, a power measurement for each device, and a disable status of each device  
15 indicating whether media from the device is disabled.  
20

23. The conference bridge of Claim 15, further comprising enabling media from the particular device to resume communication of media from the particular device  
25 to the other devices in the audio conference.

001230" 57E4360

24. Conference control software embodied in computer readable media and operable to:

establish an audio conference between a plurality of devices;

5 determine that audio content of media from a particular device is undesirable; and

disable the media from the particular device to terminate communication of the media from the particular device to the other devices in the audio conference.

10

25. The conference control software of Claim 24, wherein the media from the particular device comprises audio generated as a result of the particular device placing on hold a call associated with the audio conference.

15

26. The conference control software of Claim 24, wherein the particular device comprises a private branch exchange servicing a phone used by a conference participant, the private branch exchange operable to communicate audio when the conference participant places on hold a call associated with the audio conference.

20

27. The conference control software of Claim 24, wherein the audio conference comprises a meet-me conference and further comprising mixing media from the devices using a conference bridge.

25

004345 002400

28. The conference control software of Claim 24,  
wherein establishing an audio conference comprises:

receiving media from the devices;  
mixing media from the devices to generate a  
5 plurality of mixed signals;  
communicating mixed signals to the devices.

29. The conference control software of Claim 24,  
wherein determining comprises:

10 communicating a plurality of selectively mixed  
signals to a conference administrator device for  
monitoring, each selectively mixed signal excluding media  
from at least one of the devices; and  
receiving a command from the conference  
15 administrator device to disable media from the particular  
device.

30. The conference control software of Claim 29,  
wherein the command comprises an inband dual tone  
20 multifrequency signal, a spoken command, or an out-of-  
band signal from an administrative link.

31. The conference control software of Claim 29,  
wherein the selectively mixed signals exclude media from  
25 devices having the highest average power measurement.

32. The conference control software of Claim 24,  
wherein determining comprises:

communicating a plurality of single source signals  
30 to a conference administrator device for monitoring, each  
single source signal generated by one of the devices; and

062891.0448

receiving a command from the conference administrator device to disable media from the particular device.

5           33. The conference control software of Claim 32, wherein the single source signals comprise media from devices having the highest average power measurement.

10           34. The conference control software of Claim 24, wherein determining comprises identifying power characteristics of media associated with the particular device as indicating a recorded audio segment or broadcast radio.

15           35. The conference control software of Claim 24, further comprising:

communicating a recorded prompt to the particular device, the recorded prompt inviting the particular device to rejoin the audio conference; and

20           receiving a command to rejoin the audio conference from the particular device.

25           36. The conference control software of Claim 24, further comprising enabling media from the particular device to resume communication of media from the particular device to the other devices in the audio conference.

062891.0448

37. A conference bridge, comprising:

means for establishing an audio conference between a plurality of devices;

5 means for determining that audio content of media from a particular device is undesirable; and

means for disabling the media from the particular device to terminate communication of the media from the particular device to the other devices in the audio conference.

10

38. The conference bridge of Claim 37, wherein the particular device comprises a private branch exchange servicing a phone used by a conference participant, the private branch exchange operable to communicate audio  
15 when the conference participant places on hold a call associated with the audio conference.

39. The conference bridge of Claim 37, wherein the means for establishing an audio conference comprises:

20 means for receiving media from the devices;

means for mixing media from the devices to generate a plurality of mixed signals;

means for communicating mixed signals to the devices.

25

062891.0448

40. The conference bridge of Claim 37, wherein means for determining comprises:

means for communicating a plurality of selectively mixed signals to a conference administrator device for  
5 monitoring, each selectively mixed signal excluding media from at least one of the devices; and

means for receiving a command from the conference administrator device to disable media from the particular device.

10

41. The conference bridge of Claim 37, further comprising:

communicating a recorded prompt to the particular device, the recorded prompt inviting the particular  
15 device to rejoin the audio conference; and

receiving a command to rejoin the audio conference from the particular device.

0072891.0448

42. A method for participating in an audio conference, comprising:

communicating media to a remote location;

5 receiving mixed signals from the remote location,  
the mixed signals comprising media from a plurality of devices in an audio conference;

terminating participation in the audio conference;

receiving a recorded prompt to rejoin the audio conference; and

10 communicating a command to the remote location to rejoin the audio conference.

43. The method of Claim 42, wherein terminating participation comprises:

15 placing on hold a call associated with the audio conference; and

communicating audio to the remote location.

44. The method of Claim 42, wherein the step of  
20 communicating audio is performed by a private branch exchange servicing a phone used by a conference participant.

45. The method of Claim 42, wherein the audio  
25 conference comprises a meet-me conference.

0072891.0448

46. A method for remotely managing an audio conference through control of a conference bridge, comprising:

participating in an audio conference established by  
5 a conference bridge;

monitoring media from a plurality of devices in the audio conference to identify audio content from a particular device that is undesirable; and

communicating a command to the conference bridge to  
10 terminate communication of the media from the particular device to the other devices in the audio conference.

47. The method of Claim 46, wherein the command comprises an inband dual tone multifrequency signal, a  
15 spoken command, or an out-of-band signal communicated using an administrative link.

48. The method of Claim 46, wherein the particular device comprises a private branch exchange servicing a  
20 phone used by a conference participant, the private branch exchange operable to communicate audio when the conference participant places on hold a call associated with the audio conference.

064345 00400

49. The method of Claim 46, wherein monitoring comprises:

receiving a plurality of selectively mixed signals,  
each mixed signal excluding media from at least one of  
5 the devices;

outputting the selectively mixed signals to a  
conference administrator; and

receiving a selection of a desired mixed signal from  
the conference administrator, the desired mixed signal  
10 excluding media from the particular device.

50. The method of Claim 49, wherein the selectively  
mixed signals exclude media from devices having the  
highest average power measurement.

15

51. The method of Claim 46, wherein monitoring  
comprises:

receiving a plurality of single source signals, each  
single source signal generated by one of the devices;

20

outputting the single source signals to a conference  
administrator; and

25

receiving a selection of an offending single source  
signal from the conference administrator, the offending  
single source signal comprises media from the particular  
device.

52. The method of Claim 51, wherein the single  
source signals comprise media from devices having the  
highest average power measurement.

30

004434.03400

APPARATUS AND METHOD FOR CONTROLLING  
AN AUDIO CONFERENCE

ABSTRACT OF THE DISCLOSURE

5 A conferencing system includes a number of devices that can participate in an audio conference using a conference bridge. Responding to a human or automated conference administrator, the bridge determines that audio content of media from a particular device is undesirable, and disables media from the particular device. If appropriate, the device receives prompts to rejoin the conference at a later time.

062891.0448

001220" 6764350

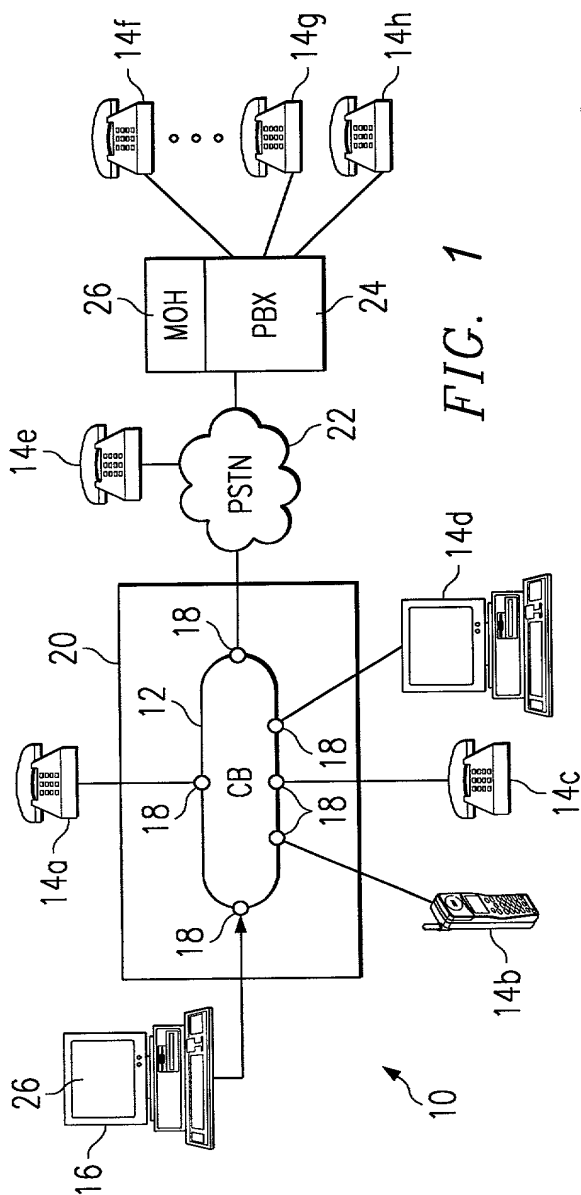


FIG. 1

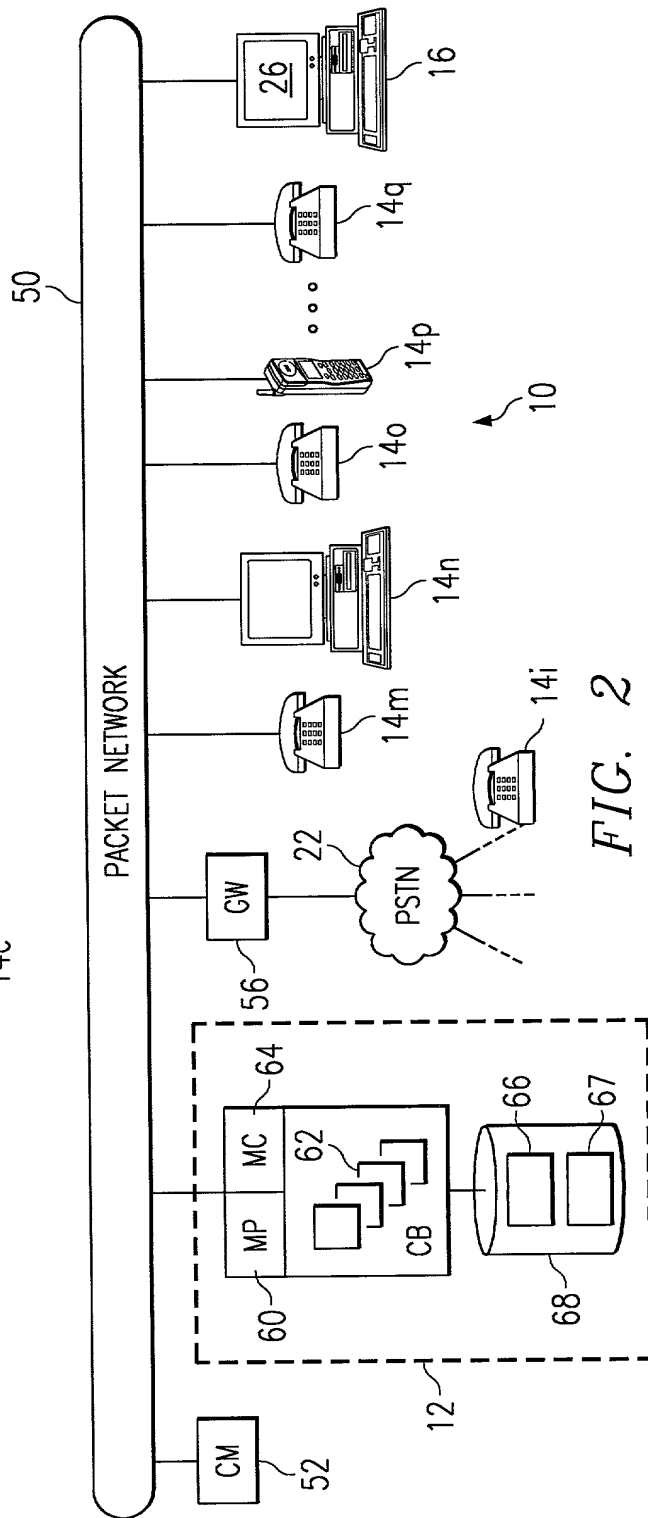


FIG. 2

66 80	70 CONFERENCE	72 ADDRESSES	74 PORTS	76 POWER	78 DISABLE	
					ANNOUNCE	NO ANNOUNCE
82	1	A	12	5	<input type="checkbox"/>	<input type="checkbox"/>
		joe@cisco	9	4	<input type="checkbox"/>	<input type="checkbox"/>
		56.0.0.112	VPI/VCI	0	<input type="checkbox"/>	<input type="checkbox"/>
		214-953-6500	3	8	<input type="checkbox"/>	<input type="checkbox"/>
82	2	john@cisco	2	3	<input type="checkbox"/>	<input type="checkbox"/>
		x5102	72.1.1.39	6	<input type="checkbox"/>	<input type="checkbox"/>
		x5108	7	5	<input type="checkbox"/>	<input type="checkbox"/>
		C	1	1	<input type="checkbox"/>	<input type="checkbox"/>
		128	193	0	<input type="checkbox"/>	<input type="checkbox"/>
		408-555-1000	11	9	<input type="checkbox"/>	<input type="checkbox"/>
	:	:	:	:	:	:
	:	:	:	:	:	:

FIG. 3

66 80	70 CONFERENCE	72 ADDRESSES	74 PORTS	76 POWER	78 DISABLE	
					ANNOUNCE	NO ANNOUNCE
82	1	A	12	5	<input type="checkbox"/>	<input type="checkbox"/>
		joe@cisco	9	4	<input type="checkbox"/>	<input type="checkbox"/>
		56.0.0.112	VPI/VCI	0	<input type="checkbox"/>	<input type="checkbox"/>
		214-953-6500	3	8	<input checked="" type="checkbox"/>	<input type="checkbox"/>
82	2	john@cisco	2	3	<input type="checkbox"/>	<input type="checkbox"/>
		x5102	72.1.1.39	6	<input type="checkbox"/>	<input type="checkbox"/>
		x5108	7	5	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		C	1	1	<input type="checkbox"/>	<input type="checkbox"/>
		128	193	0	<input type="checkbox"/>	<input type="checkbox"/>
		408-555-1000	11	9	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	:	:	:	:	:	:
	:	:	:	:	:	:

FIG. 4


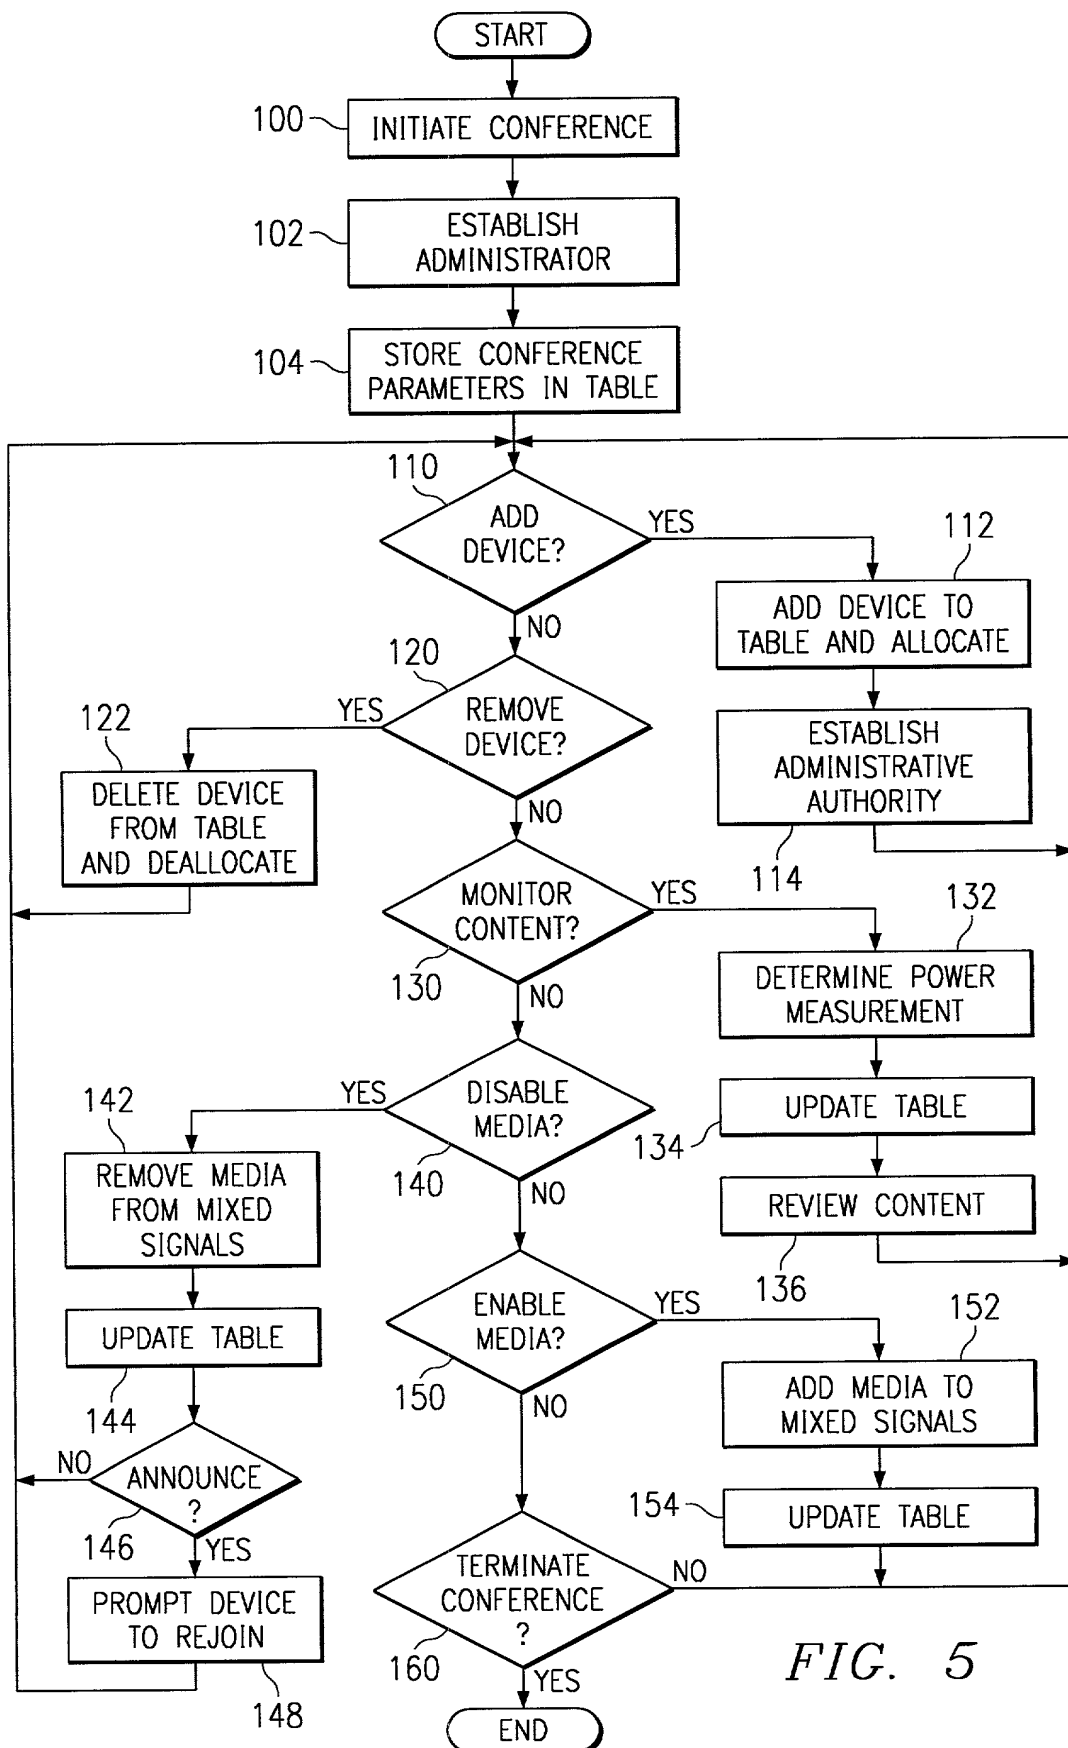


FIG. 6

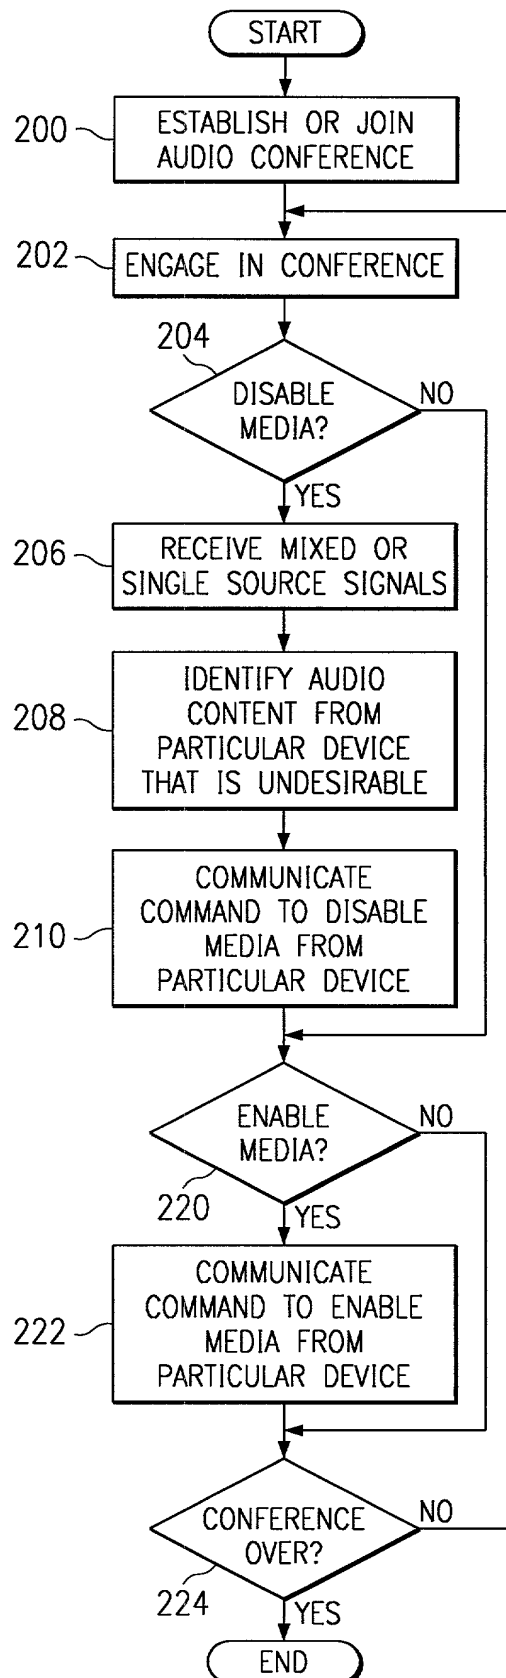

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention, design or discovery entitled APPARATUS AND METHOD FOR CONTROLLING AN AUDIO CONFERENCE, the specification of which is attached hereto;

That I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe that said invention, design or discovery was ever known or used in the United States of America before my invention or discovery thereof, or patented or described in any printed publication in any country before my invention or discovery thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application; that said invention, design or discovery has not been patented or made the subject of an inventor's certificate issued prior to the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed (Yes) (No)
-----NONE-----			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not

062891.0448

disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----NONE-----		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Samir A. Bhavsar	Reg. No. 41,617
James L. Baudino	Reg. No. 43,486
Jeffery D. Baxter	Reg. No. 45,560
Thomas A. Beaton	Reg. No. P46,543
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Floyd B. Chapman	Reg. No. 40,555
David M. Doyle	Reg. No. 43,596
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Robert W. Holland	Reg. No. 40,020
Keiko Ichiye	Reg. No. 45,460
Jay B. Johnson	Reg. No. 38,193
Christopher W. Kennerly	Reg. No. 40,675
Robert A. King	Reg. No. 42,738
Tara D. Knapp	Reg. No. 43,723
Douglas M. Kubehl	Reg. No. 41,915
Ann C. Livingston	Reg. No. 32,479
Kevin J. Meek	Reg. No. 33,738
Harold E. Meier	Reg. No. 22,428
Brian W. Oaks	Reg. No. 44,981
Kurt M. Pankratz	Reg. No. P46,977
Luke K. Pedersen	Reg. No. 45,003
Barton E. Showalter	Reg. No. 38,302
T. Murray Smith	Reg. No. 30,222
Terry J. Stalford	Reg. No. 39,522
Brain E. Szymczak	Reg. No. P47,120
Matthew B. Talpis	Reg. No. 45,152
David G. Wille	Reg. No. 38,363

00435 08400 STE450

Bradley P. Williams	Reg. No. 40,227
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Roger J. Fulghum	Reg. No. 39,678
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Patent Agents:	
Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Barton E. Showalter  
at 214.953.6509  
Atty. Docket No. 062891.0448

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the sole or first inventor:

Shmuel (nmi) Shaffer

Inventor's signature

Shmuel Shaffer  
8/15/2000

Date

Residence (City, County, State)

Palo Alto, Santa Clara County,  
California

Citizenship

Post Office Address

United States of America  
1211 Cowper Street  
Palo Alto, CA 94301